

μ-CANSAS-B1

1-channel CAN Bridge amplifier

The μ-CANSAS-B1 is a 1-channel Bridge measurement amplifier with 24 Bit A/D-conversion, which transforms an analog sensor into an intelligent, distinctly identified digital smart sensor. The conditioned and digitized signal from analog sensors can be output as a CAN- or CANopen® data stream. The μ-CANSAS-B1 is particularly designed for use in extremely hot environments.



imc μ-CANSAS general characteristics

As a CAN-bus-based measurement engineering tool, the imc μ-CANSAS offers a selection of miniaturized measurement modules which process and digitize 1-channel sensor signals and output these as CAN-messages.

Fields of application

- For test rigs, vehicle testing, road trials and all-purpose measurement applications
- Deployable both in decentralized, distributed and in centralized measurement setups
- Operable with CAN-interfaces and CAN-data loggers from either imc or 3rd-party suppliers

Properties and capabilities

Operating conditions for imc μ-CANSAS-B1-L/AS:

- Extended temperature range: -40°C to +120°C, including condensation
- Ingress Protection rating: IP65
- Mechanically robust

CAN interface:

- Configurable baud rate up to 1 MBit/s
- Default configuration ex-factory: Baud rate=500 kbit/s and IDs: Master=2, Slave=3
- Galvanically isolated

Synchronization:

- Configurable CAN data rate
- Synchronizing of multiple as well as to a global CAN-logger: based on CAN messages (no Sync-signal required)

Power supply:

- Galvanically isolated power supply input
- DC 9 V to 50 V



Heartbeat-message:

- Configurable with cyclical "life-sign", e.g. for integrity check purposes in test rigs
- Contains checksum for configuration and serial number, e.g. for consistency monitoring (checking of whether the correct module is still being used, for instance in installations undergoing maintenance)

FindMe:

- Identification of a module by means of selective LED flashing (via configuration software; does not occupy any additional CAN message)

Software

Configuration:

- Using imc CANSAS software (free of charge), including dbc-export
- Autostart with saved configuration; also pre-configurable at factory
- The module's current configuration can be read out and exported by the software; For transfer of configuration via physical transport of the module; for back tracing and recovery.
- Supports the CANopen® protocol according "CiA® DS 301 V4.0.2" and "CiA® DS 404V1.2"; see "CANSAS CANopen®" for a detailed description of the supported features and settings.

Measurement operation:

- Data logger operation:
 - Software: imc STUDIO
 - Hardware: imc measurement system with CAN-Interface, e.g. imc BUSDAQ, imc C-SERIE, imc SPARTAN imc CRONOS device family (CRFX, CRC, CRXT)
- With any desired CAN-interfaces and CAN-loggers from 3rd-party suppliers

Overview of the available variants

| Order Code | article no. | housing | signal connection | CAN connection |
|-----------------|-------------|--------------------------|---|--------------------------------------|
| CAN/μ-B1-L | 11600003 | μ-CANSAS housing | 1x 7-pin LEMO.HGG.1B.307 | 2x 5-pin LEMO.HGG.0B.305 |
| CAN/μ-B1-AS | 11600010 | μ-CANSAS housing | 1x 8-pin Phoenix (MPT0,5/8) with waterproof cable grommet | 1x 6-pin Autosport (AS208-35PA) |
| CAN/μ-H-B1 | 11600035 | plastic DIN-Rail housing | plugable terminal block (Weidmüller) | plugable terminal block (Weidmüller) |
| CAN/μ-H-B1-2.5V | 11600040 | plastic DIN-Rail housing | plugable terminal block (Weidmüller) | plugable terminal block (Weidmüller) |

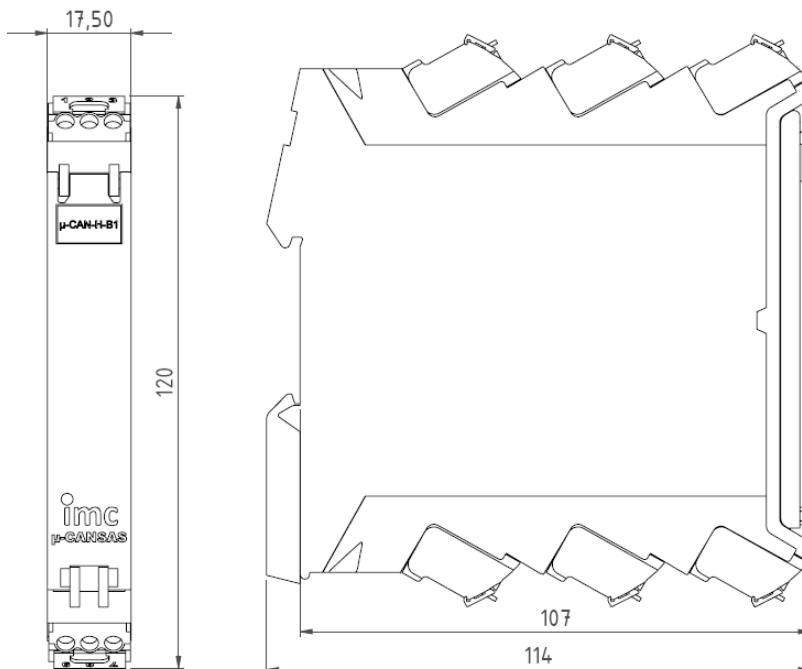
Schock resistance for imc μ-CANSAS-B1-L/AS:

- according to IEC 61373
 - Broad band random, long time test (4.33 g_{RMS} / 15h, 5 Hz to 250 Hz)
 - Schock, half-sine (30.6 g_{RMS} / 18 ms, 18 schocks)
 - Broad band random, functional test (0.55 g_{RMS} / 30min, 5 Hz to 250 Hz)

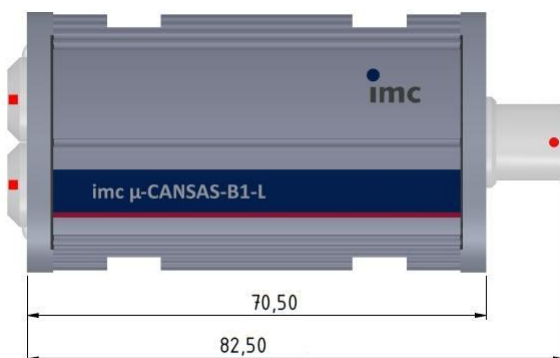
- according to IEC 60068-2-27
 - Schock, half-sine ($60 g_{RMS}$ / 6 ms, 18 schocks)
 - Schock, half-sine ($75 g_{RMS}$ / 3 ms, 18 schocks)
 - Schock, half-sine ($85 g_{RMS}$ / 3 ms, 18 schocks)
 - Schock, half-sine ($100 g_{RMS}$ / 2.5 ms, 18 schocks)
- according to MIL STD810F
 - Rail Cargo Vibration Exposure ($0.486 g_{RMS}$ / 9 h, 1 Hz to 350 Hz)
 - U.S. Highway Truck Vibration Exposure ($2.12 g_{RMS}$ / 3 h, 10 Hz to 500 Hz)
 - General Minimum Integrity ($7.7 g_{RMS}$ / 3 h, 20 Hz to 2000 Hz)

Dimensions

imc μ-CANSAS-H-B1(-2.5V)



imc μ-CANSAS-B1-L



Accessories and Connectors

Included accessories

- Calibration certificate with test equipment verification as per ISO 9001 (manufacturer's calibration certificate)
- Instruction manual, getting started with imc CANSAS (one copy per delivery)

Optional accessories

| Power adaptor | | |
|---------------|--|----------|
| CANFT/POWER-P | AC/DC power adaptor, 24 V DC, 60 W, PHOENIX, cable for CAN and power supply, LEMO.0B to DSUB-9, power supply via PHOENIX | 12100023 |

| Connector: signals | | |
|-------------------------|---|----------|
| ACC/FGG.1B.307.CLAD62ZN | plug for the signal connection (FGG series) | 13500096 |
| ACC/FEG.1B.307.CLAD62ZN | plug for the signal connection (FEG series), IP54 | 13500262 |
| ACC/GMF.1B.062.072.EN | protective IP65 cover for the LEMO 1B plug (FGG series) | 13500098 |
| ACC/SENSORCABLE1-1M | signal cable 1 m LEMO.1B, IP54, unterminated cable end | 13500255 |
| ACC/SENSORCABLE1-2M | signal cable 2 m LEMO.1B, IP54, unterminated cable end | 13500256 |
| ACC/SENSORCABLE1-5M | signal cable 5 m LEMO.1B, IP54, unterminated cable end | 13500257 |

| CAN: cable and connector | | |
|------------------------------|--|----------|
| ACC/FGG.0B.305.CLAD56ZN | plug for the CAN connection (FGG series) | 13500245 |
| ACC/GMF.0B.035.060.EN | bend relief and sealing for LEMO 0B (FGG series), IP65 | 13500272 |
| ACC/CABLE-LEMO-LEMO-1M | cable for CAN and power supply, 2x LEMO.0B, 1 m length | 13500228 |
| ACC/CABLE-LEMO-LEMO-2M5 | cable for CAN and power supply, 2x LEMO.0B, 2.5 m | 13500229 |
| ACC/CABLE-LEMO-LEMO-5M | cable for CAN and power supply, 2x LEMO.0B, 5 m | 13500259 |
| ACC/CABLE-LEMO-DSUB-2M5 | cable for CAN and power supply, LEMO.0B/DSUB, 2.5 m | 13500230 |
| ACC/CABLE-LEMO-DSUB-5M | cable for CAN and power supply, LEMO.0B/DSUB, 5 m | 13500258 |
| ACC/CABLE-LEMO-DSUB-BAN-2M5 | cable for CAN and power supply LEMO.0B/DSUB power supply via banana, 2.5 m length | 13500231 |
| ACC/CABLE-LEMO-DSUB-PHOE-2M5 | cable for CAN and power supply LEMO.0B/DSUB power supply via PHOENIX, 2.5 m length | 13500261 |
| ACC/CAP-LEMO.0B | dust protection for LEMO.0B | 13500232 |
| ACC/CAP-LEMO.1B | dust protection for LEMO.1B | 13500233 |
| ACC/CANFT-TERMI | CAN Terminator 120 Ω, LEMO.0B | 13500242 |

| Configuration package (USB) | | |
|--|--|----------|
| CANFT/USB-P | | 12100018 |
| USB-CAN interface (CAN: DSUB-9, USB 2.0); AC/DC power adaptor, 24 V DC, 60 W, connection via PHOENIX; CAN and power cable LEMO.0B/DSUB Power supply via PHOENIX, 2.5 m; CAN Terminator 120 Ω, LEMO.0B; gender changer (DSUB-9) with integrated CAN terminator; imc CANSAS configuration software (via download), including COM library and LabVIEW (TM) VI | | |

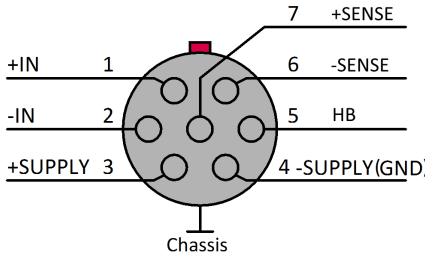
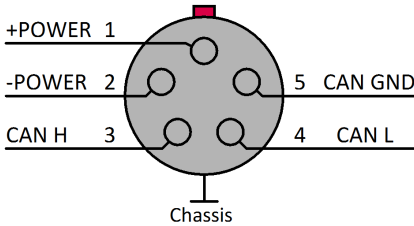
| Miscellaneous | | |
|--|--|--|
| Calibration report set for each device; report set with manufacturer's calibration certificate and individual readings, as well as list of test equipment used; meets requirements of ISO 17025. | | |

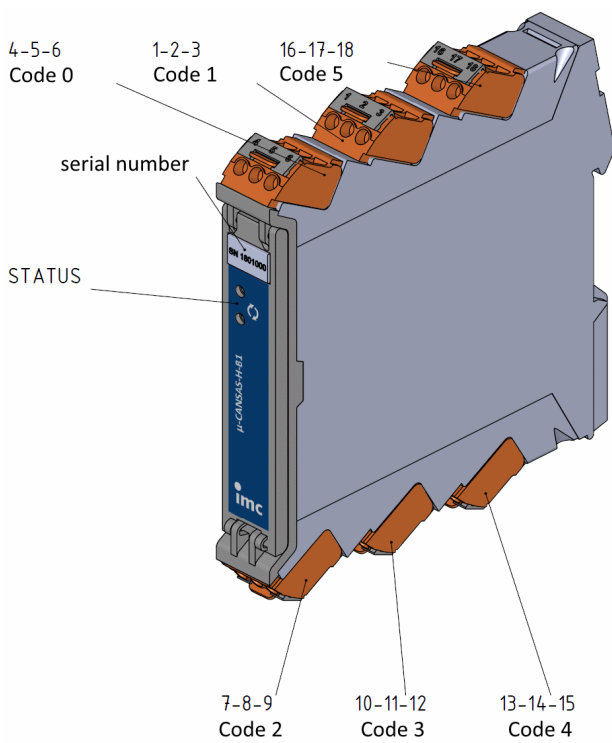
Technical Specs - μ-CANSAS-B1

| Parameter | Value | Remarks |
|------------------------------|--|---|
| Channel | 1 | |
| Measurement modes | full bridge half bridge | |
| Sampling rate | 2 kHz | |
| Analog bandwidth | 840 Hz | -3 dB |
| AD-conversion | 24 Bit | |
| CANopen® Mode | "CiA® DS 301 V4.0.2" and "CiA® DS 404V1.2" supports 1 PDO in INT16, INT32, and FLOAT | CANopen® not with CAN/μ-H-B1-2.5V |
| Input ranges | ±200 mV/V, ±100 mV/V, ±50 mV/V, ±20 mV/V, ±10 mV/V, ±5 mV/V, ±2 mV/V, ±1 mV/V ±0,5 mV/V | not with variant with bridge supply = 2.5 V |
| Bridge supply | 5 V DC 2.5 V DC | max 210 mW, short-circuit protection variant: CAN/μ-H-B1-2.5V |
| Isolation | 60 V / 500 V | long-term / 10 s |
| Input overvoltage protection | 40 V / 100 V | long-term / 1 s |
| Min. bridge impedance | 120 | $I_{max} = 42 \text{ mA}$ |
| Input impedance | 5 M 10 k | operating mode upon overvoltage or deactivated (power down) |
| Gain error | <0.1% | of measured value |
| Offset error | <2 μV/V <0.02% <0.08% | after bridge balancing for ranges: <±10 mV/V of selected range, for ranges ±200 mV/V to ±10 mV/V with electrically controlled environments in cases of HF interference with unshielded installations (applies for variant μ -CAN-H- B1(-2.5V), only) |
| Offset drift | 0.04 μV/V/K | |
| Noise | 0.32 μV/V _{rms} 0.64 μV/V _{rms} | full bridge, full bandwidth variant: bridge supply 2.5 V |

| Power supply of the module | | | |
|----------------------------|------------|----------------|---------|
| Parameter | Value typ. | min. / max. | Remarks |
| Power supply | | 9 V to 50 V DC | |
| Power consumption | 1 W | 1.5 W | |

| Operating conditions | | |
|---|--|--|
| Parameter | Value | Remarks |
| Operating temperature | -40°C to 120°C -20°C to 85°C | CAN/μ-B1-L/AS CAN/μ-H-B1(-2.5V) |
| Dimensions (W x H x D) with / without terminal connection | 40 x 20 x 82.5 / 70.5 mm 40 x 20 x 104 / 60 mm 17.5 x 120 x 114 mm | CAN/μ-B1-L CAN/μ-B1-AS CAN/μ-H-B1(-2.5V) |
| Weight | 0.1 kg 0.08 kg | CAN/μ-B1-L CAN/μ-B1-AS |

| Parameter | Value | Remarks |
|-------------------------------------|--|--|
| Terminal connection CAN / Supply | 2x LEMO 5-pin type: HGG.0B.305 1x 6-pin Autosport type: AS208-35PA plugable terminal block (Weidmüller) | CAN/μ-B1-L CAN IN and OUT CAN/μ-B1-AS CAN OUT CAN/μ-H-B1(-2.5V) |
| Measurement input | 1x LEMO 7-polig Typ: HGG.1B.307 plugable terminal block (Weidmüller) | CAN/μ-B1-L CAN/μ-H-B1(-2.5V) |
| LEMO pin configuration | input CAN/μ-B1-L, LEMO.1B:  | CAN / supply CAN/μ-B1-L, LEMO.0B:  |

| Plugable terminal block (Weidmüller) | Terminal block | Pin | configuration |
|--------------------------------------|---|-------------|---------------|
| |  | upper block | 1 |
| middle | | 2 | CAN GND |
| code 1 | | 3 | CAN Low |
| upper block | | 4 | +SUPPLY |
| front | | 5 | -SUPPLY |
| code 0 | | 6 | CAN Reset |
| block below | | 7 | +SENSE |
| front | | 8 | +VB |
| code 2 | | 9 | +IN |
| block below | | 10 | -IN |
| middle | | 11 | -VB |
| code 3 | | 12 | -SENSE |
| block below | | 13 | -IN |
| back | | 14 | HB |
| code 4 | | 15 | n.c. |
| upper block | | 16 | CAN High |
| back | | 17 | CAN GND |
| code 5 | | 18 | CAN Low |