

### imc C-SERIES: CS-4108-FD

Compact and intelligent measurement system with isolated inputs



device type: CS-4108-FD, 8 analog measurement inputs

The CS-4108 model of the imc C-SERIES is an 8-channel measurement system with isolated amplifiers, well suited for measurement tasks in environments that are not well defined in terms of electrical potentials, such as test rigs or largescale machinery. The analog input channels are galvanically isolated and equipped with individual signal conditioning including filters. They allow voltage measurement up to 60 V as well as temperature mode (thermocouple, PT100).

Additional pulse counter inputs support direct measurement of RPM, velocity or displacement or event counting. Two integrated CAN FD nodes allows communication with control units (ECUs) and acquisition of vehicle or machine data, CAN based sensors or additional CAN measurement modules of the imc CANSAS series.

#### imc C-SERIES - complete, compact and portable measurement devices

The imc C-SERIES is a family of device models each having a fixed hardware configuration. These measurement systems can operate in conjunction with a connected PC (via Ethernet) for setup, data storage and visualization, or in autarkic stand alone mode. In case of power outages, full data integrity on the built-in Flash removable memory volume is ensured by means of UPS buffering, which ensures the safe termination and storage of all open measurement data files.

All C-SERIES-FD devices come standard with two CAN interfaces, which can be operated both in standard-CAN mode and in extended CAN FD configuration (FD: flexible Data Rate with an extended data rate of up to 8 Mbaud). Since the operation mode can be software-configured separately for each node, the user benefits from a maximum flexibility and 100% backward compatibility with predecessor models such as the C-SERIES-N.

## Highlights

- Integrated CAN FD-Interface
- Real-time signal processing and closed loop control and test automation with imc Online FAMOS
- Counter inputs (measurement of RPM, speed, angle, time, events etc.)
- Digital inputs and outputs
- Analog outputs (DAC)
- Data storage to onboard flash media (CF card) or network harddrive (NAS etc.)
- Complex triggering system, PC independent
- Optional internal WiFi (WLAN) adaptor
- Supports platform independent remote access via standard internet browser (optionally integrated imc REMOTE Webserver)
- Networking (TCP/IP) and synchronizable with other imc measurement systems via:
  - isolated Sync-Signal (DCF-77, IRIG-B)
  - network based via NTP
  - GPS
- Measurement channel extension via direct connection of CAN based measurement modules of the imc CANSAS series
- In conjunction with the operating software imc STUDIO the devices are immediately ready to take measurements with all functionality supported.


## Overview of the available CS-4108 devices

Order code	article no.	housing	analog channels	properties
CS-4108-FD	14000116	CS alu profile	8	CAN FD and Super-Cap UPS
CS-4108-FD-ET	14100056			for extended temperature range

## Extra option (factory order option)

- Internal WiFi-adaptor
- Integrated sensor supply; with [adjustable supply voltages](#) <sup>12</sup> (globally selectable for 8 channels), output on reserved pins of DSUB terminal, requires no extra housing expansion.

## Mechanical drawings with dimensions

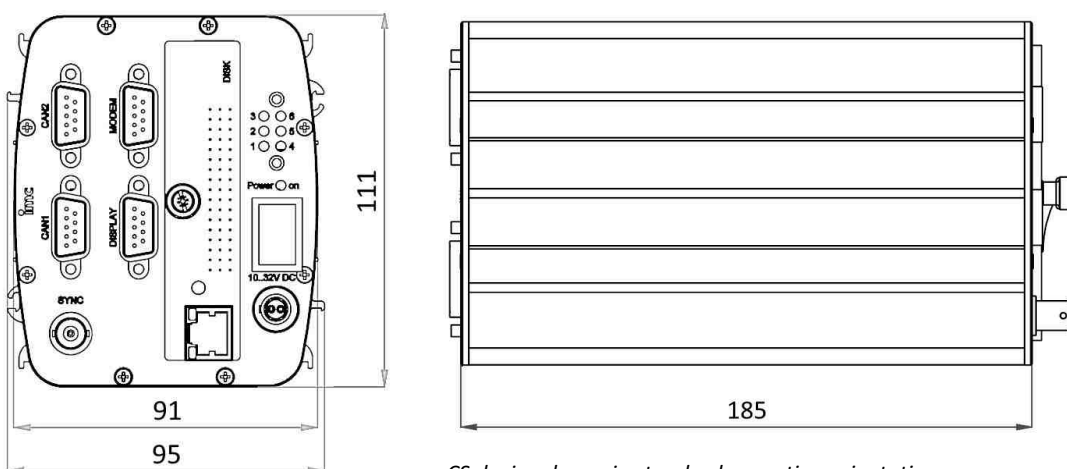

CS device shown in standard operating orientation.

## Software minimum requirements

Operation of the "FD" series devices requires operating software of the following group:  
imc STUDIO 5.0 R9 associated with firmware and driver package imc DEVICES 2.9 R6.

## Included accessories

AC/DC power adaptor 110-230V AC (with appropriate LEMO plug)		article no.
CRPL/AC-ADAP-60W-1B	24 V DC, 60 W, LEMO.1B.302	10800066
DSUB-15 plug		
2x ACC/DSUBM-T4	DSUB-15 plug with screw terminals for 4-channel measurement of voltages as well as temperatures with PT100 and thermocouples with integrated cold junction compensation (CJC).	13500167
1x ACC/DSUBM-DI4-8	DSUB-15 plug for 8 digital inputs	13500174
1x ACC/DSUBM-DO8	DSUB-15 plug for 8 digital outputs	13500173
1x ACC/DSUBM-ENC4	DSUB-15 plug for 4 incremental inputs	13500171
1x ACC/DSUBM-DAC4	DSUB-15 plug for 4 analog outputs	13500177
Documents		
Getting started with imc C-SERIES (one copy per delivery)		
Device certificate		
Miscellaneous		
1x Ethernet network cable with latch protection (uncrossed, 2 m)		
1x LEMO.1B plug (ACC/POWER-PLUG1)		

## Optional accessories

DSUB-15 plug		
ACC/DSUBM-U4	DSUB-15 plug with screw terminals for 4-channel voltage measurement	13500166
ACC/DSUBM-I4	DSUB-15 plug with screw terminals for 4-channel current measurement of up to 50 mA (50 $\Omega$ shunt, scaling factor: 0.02 A/V)	13500168
ACC/DSUB-ICP4	DSUB-15 plug for 4 IEPE/ICP sensors, BNC connection	13500032
ACC/DSUBM-ICP2I-BNC-S	DSUB-15 plug for 2 IEPE/ICP sensors <sup>1</sup> , BNC connection, isolated, <b>slow</b>	13500293
ACC/DSUBM-ICP2I-BNC-F	DSUB-15 plug for 2 IEPE/ICP sensors <sup>1</sup> , BNC connection, isolated, <b>fast</b>	13500294
Mounting brackets for fixed installations		
C/CS-BRACKET-90	mounting bracket 90°; mounting CS devices on a flat surface	14000064
C/CS-19"-RACK	19" RACK for up to 4 CS devices	14000091
Documents		
SERV/CAL-PROT	Calibration protocol per amplifier; imc manufacturer calibration certificate with measurement values and list of calibration equipment used (pdf).	150000566
SERV/CAL-PROT-PAPER	Calibration protocol per amplifier (paper print) imc manufacturer calibration certificate with measurement values and list of calibration equipment used with signature and seal.	150000578
Device certificates and calibration protocols: Detailed information on certificates supplied, the specific contents, underlying standards (e.g. ISO 9001 / ISO 17025) and available media (pdf etc.) can be found on our website, or you can contact us directly.		

## Further accessories (see separate price list of the accessories)

- recommended and verified removable flash storage media
- external display (via DSUB-9)
- GPS-receiver (with DSUB-9 connection)

1 When using the 2-channel plug only two channels (first and third channel) out of four are usable.

## General Technical Specs

Terminal connection		
Parameter	Value	Remarks
Terminal connection	2x DSUB-15	8 analog inputs
Terminal connection DI, DO, INC, DAC	1x DSUB-15 1x DSUB-15 1x DSUB-15 1x DSUB-15	8 digital inputs 8 digital outputs 4 counter inputs 4 analog outputs
Further terminal connection	RJ45 CF-Card Slot 2x DSUB-9 DSUB-9 DSUB-9 BNC LEMO FGG.1B.302	Ethernet (100 Mbit), PC/network removable storage two CAN FD nodes external display external GPS module synchronization supply
Weight	approx. 2 kg	
Dimensions (WxHxD) in mm	95 x 111 x 185	
Power supply		
Power supply	10 V to 32 V DC	
Max. power consumption	<20 W	
Isolation of supply input	not-isolated	
AC/DC adaptor	110 V to 230 V AC	external adaptor included in delivery
Auto start upon power up	configurable	automatic start of measurement
UPS and Data integrity		
Autarkic operation without PC	✓	
Self start (automatic data acquisition operation)	configurable	timer, absolute time, automatic start when power supply is available
Auto data-saving upon power outage	✓	buffering (UPS) with "auto-stop": auto-stop of measurement, data storage and automatic shutdown
UPS	integrated	Super-Caps
Charging time of the Super-Caps	360 s	minimum required active operation for full UPS functionality
UPS coverage	complete system	
UPS delay per power outage	1 s	"buffer time constant": required duration of a continuous outage that will trigger auto shutdown procedure fix parameter: not changeable in device configuration!
Effective buffer capacity	100 mWh	sufficient for auto-stop (max. 12 s); with fully charged Super-Caps (after minimum operating duration)

Data acquisition, trigger		
Parameter	Value	Remarks
Max. aggregate sampling rate	400 kS/s	
Channel individual sampling rates	selectable in 1–2–5 steps	
Number of sampling rates: analog channels, DI and counter	2	usable simultaneously in one configuration
Number of sampling rates: fieldbus channels	arbitrary	
Number of sampling rates: virtual channels	arbitrary	data rates generated via imc Online FAMOS (e.g. via reduction)
Monitor channels	✓ of the types: analog, DI and counter (incremental counter) and CAN	doubled channels with independent sampling and trigger settings
Intelligent trigger functions	✓	e.g. logical combination of multiple channel events (threshold, transition) to create triggers that start and stop acquisition of assigned channels
Multi.triggered data acquisition	✓	multiple trigger-machines and multi-shot
Independent trigger-machines	48	start/stop, arbitrary channel assignment
Direct onboard data reduction: arithmetic mean, min, max.	✓	
Extensive real-time calculation and control functions	✓	included in standard delivery (via imc Online FAMOS)
External GPS signal receiver	0	
Internal WiFi (WLAN) adaptor	0 IEEE 802.11g (1 antenna) max. 54 Mbit/s	

Maximum channel count per device								
Active channels		512		active channels of the current configuration: Total sum of analog, digital, fieldbus and virtual channels as well as possible monitor channels				
Fieldbus channels		1000		Number of defined channels (active and passive); Currently activated channels are limited by the total number of activated channels (512).				
Process vector variables		800		The process vector is a collection of single-value variables, each containing the latest current measured values. A process vector variable is automatically created for each channel.				
		without monitor channels			with monitor channels			
Channel type	determined by	limit (active+passive)	activated	total activated	limit (active+passive)		activated	total activated
Analog channels	depending device type	8..24	8..24	512	Channel	8..24	16..48	512
					Monitor	8..24		
Incremental counter	standard	4	4		Channel	4	4	
					Monitor	4	4	
Digital DI-Ports	standard	1	1		Port	1	1	
					Monitor	1	1	
Digital DO/DAC-Ports	standard	2	2		Port	2	2	
					Channel	1000	512	
Fieldbus-channels	definable (dbc)	1000	512		Monitor			
					-	-	512	
Virtual channels (OFA)	definable (OFA)	-	512					

DI-ports (respectively channels) have monitor-ports, DO/DAC-ports in contrary do not have monitor-ports

Storage, signal processing		
Parameter	Value	Remarks
Internal flash storage	CF-card	removable cover for the CF slot
Removable flash storage media	CF	recommended media available at imc; the specified operating temperature range of the media is relevant
Storage on NAS (network storage)	✓	alternatively to onboard Flash storage
Arbitrary memory depth with pre- and post trigger	✓	maximum pretrigger limited by size of Circular Buffer RAM; posttrigger only limited by available mass storage (Flash)
Circular buffer mode	✓	cyclic overwrite of circular buffer memory on mass storage media
Synchronization	DCF 77 GPS IRIG-B NTP	Master / Slave via external GPS-receiver TTL via network

Operating conditions		
Parameter	Value	Remarks
Operating environment	dry, non corrosive environment within specified operating temperature range	
Rel. humidity	80% up to 31°C, above 31°C: linear declining to 50%	according IEC 61010-1
Ingress protection rating	IP20	
Pollution degree	2	
Operating temperature (Standard)	-10°C to +55°C	without condensation
Operating temperature (extended: "-ET" version)	-40°C to +85°C	condensation temporarily allowed
Shock- and vibration resistance	IEC 61373, IEC 60068-2-27 IEC 60068-2-64 category 1, class A and B MIL-STD-810 Rail Cargo Vibration Exposure U.S. Highway Truck Vibration Exposure	
Extended shock- and vibration resistance	upon request	specific tests or certifications upon request

## Synchronization and time base

Time base of individual device without external synchronization			
Parameter	Value typ.	min. / max.	Remarks
Accuracy RTC		±50 ppm 1 µs (1 ppm)	not calibrated (standard devices), at 25°C calibrated devices (upon request), at 25°C
Drift	±20 ppm	±50 ppm	-40°C to +85°C operating temperature
Ageing		±10 ppm	at 25°C; 10 years

Time base of individual device with external synchronization signal				
Parameter	GPS	DCF77	IRIG-B	NTP
Supported formats	NMEA / PPS <sup>(1)</sup>		B000, B001 B002, B003 <sup>(2)</sup>	Version ≤4
Precision	±1 µs			<5 ms after ca. 12 h <sup>(3)</sup>
Jitter (max.)	±8 µs			
Voltage level	TTL (PPS <sup>(1)</sup> ) RS232 (NMEA)	5 V TTL level		---
Input impedance	1 kΩ (pull up)	20 kΩ (pull up)		---
Input connection	DSUB-9 "GPS" not isolated	BNC "SYNC" (isolated) (test voltage: 300 V, 1 min.)		RJ45 "LAN"
Cable shield connection		BNC: isolated Signal-GND (marked with yellow ring)		---

Synchronization of multiple devices via DCF (Master/Slave)			
Parameter	Value typ.	min. / max.	Remarks
Max. cable length		200 m	BNC cable type RG58 (propagation delay of cable needs to be considered)
Max. number of devices		20	only slaves
Common mode SYNC not-isolated	0 V		with non-isolated BNC connector: devices must have the same ground voltage level, otherwise signal integrity issues (signal artifacts and noise) may result
SYNC isolated		max. 50 V	with isolated BNC connector: SYNC-signal is already internally isolated, for reliable operation even with different ground voltage level (ground loops)
Voltage level	5 V		
DCF input/output	"SYNC" connection		BNC

(1) PPS (Pulse per second): signal with an impulse >5 ms is necessary

(2) using BCD information only

(3) Max. value, concerning the following condition: first-synchronization



## CS-4108-FD analog inputs

Channels, measurement modes		
Parameter	Value	Remarks
Channels	8	
Measurement modes	voltage measurement current measurement thermocouple, RTD (PT100) current fed sensors (IEPE/ICP)	voltage (ACC/DSUBM-U4) shunt plug (ACC/DSUBM-I4) thermo plug (ACC/DSUBM-T4) with IEPE DSUB-15 extension plug: ACC/DSUB-ICP4, not isolated ACC/DSUBM-ICP2I-BNC-S/-F <sup>1</sup> , isolated, basic functionality (ICP-operation)
Sampling rate, Bandwidth, Filter, TEDS		
Parameter	Value	Remarks
Sampling rate	≤100 kHz ≤10 kHz	per channel at temperature measurement
Bandwidth	0 Hz to 11 kHz 0 Hz to 8 kHz 0 Hz to 1 kHz	-3 dB -0.2 dB -0,1 dB at temperature measurement
Filter (digital) cut-off frequency characteristic type and order	2 Hz to 5 kHz	Butterworth, Bessel low pass filter: 8th order high pass filter: 4th order band pass: LP 4th and HP 4th order Anti-aliasing filter: Cauer 8.order with $f_{\text{cut-off}} = 0.4 f_a$
TEDS - Transducer Electronic DataSheets	conforming to IEEE 1451.4 Class II MMI	esp. with ACC/DSUBM-TEDS-xx (DS2433) not supported: DS2431 (typ. IEPE/ICP sensor)
Characteristic curve linearization	user defined (max. 1023 supporting points)	

- 1 When using the two-channel IEPE plug in combination with the analog inputs, which provide four channels per socket, only channels 1 and 3 can be used. Only the IEPE base functionality is supported by this module, see also TD ACC/DSUBM-ICP2I-BNC.

General				
Parameter	Value typ.	min. / max.	Remarks	
Isolation	galvanically isolated		channel-to-channel and against system ground (housing, CHASSIS, PE), as well as against common reference of all PT100 current sources and TEDS. not isolated when using ICP plug and PT100 mode	
nominal rating	±60 V			
test voltage	±300 V (10 s)			
Overvoltage protection	±60 V ESD 2 kV transient protection: automotive load dump ISO 7637		differential input voltage, continuous human body model  R <sub>i</sub> =30 Ω, t <sub>d</sub> =300 μs, t <sub>r</sub> <60 μs	
Input coupling	DC			
Input configuration	differential, isolated			
Input impedance	6.7 MΩ 1 MΩ 50 Ω		range ≤±2 V and temperature mode range ≥±5 V or device powered down with shunt plug ACC/DSUBM-I4	
Input current			for operation	
operating conditions		1 nA	V <sub>in</sub>   > 5 V on ranges <±5 V	
on overvoltage condition		1 mA	or device powered-down	
Auxiliary supply			for IEPE/ICP plug	
voltage	+5 V	±5 %	independent of optional	
available current	>0.26 A	>0.2 A	sensor supply, short circuit proof	
internal resistance	1.0 Ω	<1.2 Ω	power per DSUB-plug	
Voltage measurement				
Parameter	Value typ.	min. / max.	Remarks	
Voltage input ranges	±60 V / ±50 V / ±25 V / ±10 V ±5 V / ±2 V / ±1 V / ±500 mV ±250 mV / ±100 mV / ±50 mV			
Gain error	<0.02 %	<0.05 %	of the measured value, at 25 °C	
Gain drift		6 ppm/K·ΔT <sub>a</sub> 50 ppm/K·ΔT <sub>a</sub>	ranges ≤±2 V ranges ≥±5 V	over full temp. range
Offset error	0.02 %	<0.05 %	of the measurement range, at 25 °C	
Offset drift		2.5 ppm/K·ΔT <sub>a</sub>	over entire temperature range ΔT <sub>a</sub> = T <sub>a</sub> -25 °C ; with T <sub>a</sub> = ambient temperature	
Non-linearity	<120 ppm		range ±10 V	
Signal noise	2.5 μV <sub>rms</sub> 20 μV <sub>pkpk</sub>		bandwidth 0.1 Hz to 1 kHz; in the range: ±50 mV	
IMR (isolation mode rejection)	140 dB 64 dB	>130 dB >60 dB	range ≤±2 V range ≥±5 V	R <sub>source</sub> = 0 Ω, f=50 Hz
Channel isolation	>1 GΩ, < 40 pF		channel-to-ground / CHASSIS (case)	
	>1 GΩ, <10 pF		channel-to-channel	
Channel isolation (crosstalk)	>165 dB (50 Hz) >92 dB (50 Hz)		range ≤±2 V range ≥±5 V	R <sub>source</sub> ≤100 Ω

Current measurement with shunt plug			
Parameter	Value typ.	min. / max.	Remarks
Input ranges	$\pm 40 \text{ mA} / \pm 20 \text{ mA} / \pm 10 \text{ mA}$ $\pm 5 \text{ mA} / \pm 2 \text{ mA} / \pm 1 \text{ mA}$		
Shunt impedance	50 $\Omega$		external plug ACC/DSUBM-I4
Input configuration	differential		
Gain error	<0.02 %	<0.05 % <0.1%	of the measured value, with 25 °C additional error of 50 $\Omega$ in plug
Gain drift		6 ppm/K· $\Delta T_a$ 50 ppm/K· $\Delta T_a$	ranges $\leq \pm 2 \text{ V}$ over entire temp. range ranges $\geq \pm 5 \text{ V}$
Offset error	0.02 %	<0.05 %	of the measurement range
Offset drift		2.5 ppm/K· $\Delta T_a$	over entire temperature range $\Delta T_a =  T_a - 25^\circ\text{C} $ ; with $T_a$ = ambient temperature

Temperature measurement - thermocouples			
Parameter	Value typ.	min. / max.	Remarks
Measurement mode	R, S, B, J, T, E, K, L, N		
Measurement range	-270°C to 1370°C -270°C to 1100°C -270°C to 500°C		type K
Resolution	0.063 K (1/16 K)		16-Bit integer
Measurement error		< $\pm 0,6 \text{ K}$  < $\pm 1.0 \text{ K}$  < $\pm 1.5 \text{ K}$	type K, range -150°C to 1200°C type T, range -150°C to 400°C type N, range 380°C to 1200°C type K, range -200°C to -150°C type T, range -200°C to -150°C type N, range -200°C to 380°C
Temperature drift	$\pm 0.02 \text{ K/K} \cdot \Delta T_a$		$\Delta T_a =  T_a - 25^\circ\text{C} $ ; with $T_a$ = ambient temperature
Error of cold junction compensation		< $\pm 0.15 \text{ K}$	with ACC/DSUBM-T4
Temperature drift	$\pm 0.001 \text{ K/K} \cdot \Delta T_a$		$\Delta T_a =  T_a - 25^\circ\text{C} $ ; with $T_a$ = ambient temperature

Temperature measurement – PT100		
Parameter	Value	Remarks
Measurement range	-200°C to +850°C -200°C to +250°C	
Resolution	0.063 K (1/16 K)	
Gain error	< $\pm 0.05\%$	of measured value (corresponding resistance)
Offset error	< $\pm 0.2 \text{ K}$	with 4-wire configuration
Offset drift	$\pm 0.01 \text{ K/K} \cdot \Delta T_a$	$\Delta T_a =  T_a - 25^\circ\text{C} $ ; with $T_a$ = ambient temperature
Sensor feed	250 $\mu\text{A}$	non-isolated

Sensor supply (Cx-41xx-SUPPLY)			
Parameter	Value typ.		max.
Configuration options	5 selectable settings		
			The sensor supply module always has 5 selectable voltage settings. default selection: +5 V to +24 V
Output voltage	Voltage (+2.5 V) +5.0 V +10 V +12 V +15 V +24 V (±15 V)	Current 580 mA 580 mA 300 mA 250 mA 200 mA 120 mA 190 mA	Netpower 1.5 W 2.9 W 3.0 W 3.0 W 3.0 W 2.9 W 3.0 W
			set jointly for all eight channels optional, special order: +12 V or 15 V can be replaced by +2.5 V preferred selection with 2.5 V: +2.5 V, +5.0 V, +10 V, +12 V, +24 V  Special order: +15 V can be replaced by ±15 V. With the LEMO variant, TEDS support is omitted with this choice, see manual.
Short-circuit protection	unlimited duration		to output voltage reference ground
Accuracy of output voltage	<0.25 %		0.5 % 0.9 % 1.5 %
			at terminals, no load at 25°C over entire temperature range plus with optional bipolar output voltage
Max. capacitive load	>4000 µF >1000 µF >300 µF		2.5 V to 10 V 12 V, 15 V 24 V

## Technical Specs DI / DO / ENC / DAC

### Digital Inputs

Parameter	Value	Remarks
Channels	8	common ground reference for each 4-channel group, isolated from the other input group
Configuration options	TTL or 24 V input voltage range	configurable at the DSUB globally for 8 Bits: <ul style="list-style-type: none"> <li>jumper from LCOM to LEVEL: activates TTL-mode</li> <li>LEVEL unconnected: activates 24 V-mode</li> </ul>
Sampling rate	≤10 kHz	
Isolation strength	±50 V	tested ±200 V isolated to system ground, supply and channel-to-channel
Input configuration	differential	
Input current	max. 500 µA	
Switching threshold	1.5 V (±200 mV) 8 V (±300 mV)	5 V level 24 V level
Switching time	<20 µs	
Supply HCOM	5 V max. 100 mA	electrically isolated from system (case), Configuration signal "LEVEL" is referenced to HCOM, LCOM
Terminal connection	DSUB-15	ACC/DSUBM-DI4-8

## Digital outputs

Parameter	Value		Remarks
Channels / bits	8 bit		Group of 8 bits, galvanically isolated; common reference potential ("LCOM") for each group
Isolation strength	$\pm 50$ V		to system ground (case, CHASSIS)
Output configuration	totem pole (push-pull) or open-drain		configurable at the DSUB globally for 8 Bits: <ul style="list-style-type: none"> <li>jumper from OPDRN to LCOM: totem pole</li> <li>OPDRN unconnected: open-drain</li> </ul>
Output level	TTL  or max. $U_{\text{ext}} - 0.8$ V		internal, galvanically isolated supply voltage  by connecting an external supply voltage $U_{\text{ext}}$ with "HCOM", $U_{\text{ext}} = 5$ V to 30 V
State upon system power up	high impedance (High-Z)		Independent of output configuration (OPDRN-pin)!
Activation of the output stage following system start	upon first preparation of measurement		with initial states which can be selected in the experiment (High / Low) in the selected output configuration (OPDRN-pin)
Max. output current (typ.)	HIGH	LOW	
TTL	15 mA	0.7 A	external clamp diode needed for inductive load
24 V-logic	22 mA	0.7 A	
open-drain	---	0.7 A	
open-drain with intern. 5 V supply		160 mA	for all outputs
Output voltage	HIGH	LOW	for load current:
TTL	$> 3.5$ V	$\leq 0.4$ V	$I_{\text{high}} = 15$ mA, $I_{\text{low}} \leq 0.7$ A
24 V-logic ( $U_{\text{ext}} = 24$ V)	$> 23$ V	$\leq 0.4$ V	$I_{\text{high}} = 22$ mA, $I_{\text{low}} \leq 0.7$ A
Internal supply voltage	5 V, 160 mA (isolated)		available at terminals
Switching time	$< 100$ $\mu$ s		
Terminal connection	DSUB-15		ACC/DSUBM-DO8

## ENC4: Pulse counter for incremental encoder

Parameter	Value		Remarks
Channels	4 + 1 (5 tracks)		four single-tracks or two two-track channels one index track
Measurement modes	Displacement (abs), Displacement (diff), Angle (abs), Angle (diff), Event, Frequency, Speed, Velocity, Time and Puls Time Measurement		only if the sampling rate is $\leq 1$ ms
Sampling rate	$\leq 50$ kHz		per channel only one sampling rate for all 4 channels allowed
Time resolution of measurement	31.25 ns		counter frequency: 32 MHz
Data resolution	16 bits		
Input configuration	differential		
Input impedance	100 k $\Omega$		
Input voltage range	$\pm 10$ V		differential
Common mode input range	min. -11 V	max. +25 V	
Switching threshold	-10 V to +10 V		detection level selectable per channel
Hysteresis	min. 100 mV		selectable per channel
Analog bandwidth	500 kHz		-3 dB (full power)
Analog filter	Bypass (no Filter), 20 kHz, 2 kHz, 200 Hz		selectable (per-channel) 2 <sup>nd</sup> order Butterworth
Switching delay	500 ns		signal: 100 mV squarewave
CMRR	70 dB 60 dB	50 dB 50 dB	DC, 50 Hz 10 kHz
Gain error	<1 %		of input voltage range @ 25 °C
Offset error	<1 %		of input voltage range @ 25 °C
Overvoltage strength	$\pm 50$ V		to system ground
Sensor supply	+5 V, 300 mA		not isolated (reference: GND, CHASSIS)
Terminal connection	DSUB-15		ACC/DSUBM-ENC4

## Analog outputs

Parameter	Value typ.	min. / max.	Remarks
Channels	4		
Output level	$\pm 10$ V		
Load current	max. $\pm 10$ mA / channel		
Resolution	16-bit		15-bit, no missing codes
Non-linearity	$\pm 2$ LSB	$\pm 3$ LSB	
Max. output frequency	50 kHz		
Analog bandwidth	50 kHz		-3 dB, low pass 2nd order
Gain error	< $\pm 5$ mV	< $\pm 10$ mV	-40 °C to 85 °C
Offset error	< $\pm 2$ mV	< $\pm 4$ mV	-40 °C to 85 °C
Terminal connection	DSUB-15		ACC/DSUBM-DAC4

## CAN FD Bus Interface

Parameter	Value	Remarks
Number of CAN-nodes	2	one galvanically isolated node per connector
Terminal connection	2x DSUB-9	
Topology	bus	
Transfer protocol	configurable per software: CAN FD (ISO Standard) (max. 8 MBaud) non-ISO CAN FD (Draft) (max. 8 MBaud) CAN High Speed (max. 1 MBaud) CAN Low Speed (max. 125 KBaud)	individually for each node current standard according ISO 11898-1:2015 former draft (Bosch)  according ISO 11898  according ISO 11519
Operating principle	Multi Master principle	
Direction of data flow	sending and receiving	
Baud rate	5 kbit/s to 8 Mbit/s	configurable via software; maximum is depending on selected protocol (FD/High/Low Speed)
Termination	120 $\Omega$	switchable by software for each node
Isolation strength	$\pm 60$ V	to system ground and case
Direct access for configuration of imc CANSAS modules	yes	via the CAN node of the device with imc STUDIO (CAN High Speed Mode only)



### Note

### Remote Frame

imc devices actually does not support Remote Frames (RTR) according to CAN specification.





An Axiometrix Solutions Brand

# Contact imc

## Adresse

imc Test & Measurement GmbH

Voltastr. 5

13355 Berlin

Telefon: +49 30 467090-0

E-Mail: [info@imc-tm.de](mailto:info@imc-tm.de)

Internet: <https://www.imc-tm.com>

## Technischer Support

Zur technischen Unterstützung steht Ihnen unser technischer Support zur Verfügung:

Telefon: +49 30 467090-26

E-Mail: [hotline@imc-tm.de](mailto:hotline@imc-tm.de)

Internet: <https://www.imc-tm.com/service-training/>

## Service und Wartung

Für Service- und Wartungsanfragen steht Ihnen unser Serviceteam zur Verfügung:

E-Mail: [service@imc-tm.de](mailto:service@imc-tm.de)

Internet: <https://www.imc-tm.com/service>

## imc ACADEMY - Trainingscenter

Der sichere Umgang mit Messgeräten erfordert gute Systemkenntnisse. In unserem Trainingscenter werden diese von erfahrenen Messtechnik Spezialisten vermittelt.

E-Mail: [schulung@imc-tm.de](mailto:schulung@imc-tm.de)

Internet: <https://www.imc-tm.com/service-training/imc-academy>

## Internationale Vertriebspartner

Den für Sie zuständigen Ansprechpartner, finden Sie in unserer Übersichtsliste der imc Partner:

Internet: <https://www.imc-tm.com/imc-weltweit/>

## imc @ Social Media

<https://www.facebook.com/imcTestMeasurement>

<https://www.youtube.com/c/imcTestMeasurementGmbH>

[https://x.com/imc\\_de](https://x.com/imc_de)

<https://www.linkedin.com/company/imc-test-&-measurement-gmbh>