

imc CANSASflex-SCI8/-SCI16

8 or 16 channel CAN isolated measurement module for voltage, current (20 mA) and temperature

The imc CANSASflex-SCI8 and SCI16 measurement modules are 8 or 16 channel CAN bus measurement amplifiers that comprise analog conditioning of physical sensor signals, digitization and output via CAN bus. The multiplexed, isolated differential inputs allow (depending on the variant) acquisition of:

- Voltage (100 mV to 60 V)
- Current (20 mA sensors)
- Temperature (Thermocouples, PT100)



imc CANSASflex-SCI16

Module versions with DSUB-15 connectors support all measurement modes. Versions with alternative connectors, such as thermocouple inputs, support only these selected modes.

The modules are available in both short and long housings.

Specific techniques aimed at noise and interference suppression (esp. block averaging) allow for very sensitive voltage and temperature measurements even in demanding environments, despite its multiplexed architecture.

At a sampling rate of 1 Hz (SCI16) or 2 Hz (SCI8), this guarantees very stable measurements and an effective suppression of noise and aliasing caused by power line interference (50/60 Hz) and higher frequency disturbances.

Even the use of faster sampling rates is supported. However, since this operating mode does not provide full suppression of aliasing by line interference it should be limited to applications with signals of reasonable level and without significant spectral content (with respect to both noise and physical signal) beyond the selected sampling rate.

Highlights

- Measurement ranges and sampling rates can be set per channel (in steps of 1, 2, 5)
- Optimized for precise and robust measurement at 1 Hz (SCI16) and 2 Hz (SCI8) sampling rate: with very good suppression of noise, interference and aliasing
- Isolation between channels: ± 60 V
- Voltage measurement up to ± 60 V (internal divider)
- 24 Bit digitization and internal processing, CAN-output format: 16 Bit
- Optional: adjustable sensor supply (e.g. for active voltage fed sensors)
- Support of imc Plug & Measure:
TEDS (Transducer Electronic Data Sheets, IEEE 1451.4)

Typical applications

- High-precision measurements of voltage and temperature at low sampling rates.
- Measurements with unclear potential conditions, e.g., as found in the automotive or railway sectors.



imc CANSASflex-SCI8

General imc CANSASflex functions and specifications

As a CAN-bus-based measurement engineering tool, the imc CANSASflex series offers a wide selection of measurement modules which process and digitize sensor signals and output these as CAN-messages.

The modules of the imc CANSASflex series (CANFX) can be joined together mechanically and electrically by means of a latching ("click") mechanism, without the use of any tools nor the need for any extra cables, and also allows the CAN-logger imc BUSDAQflex (BUSFX) to dock on directly. Depending on the module type, they are available in either long (L-), short, or both housing versions.

Besides fixed installations or operation on a laboratory bench, the modules are also designed to fit in a special 19" subrack to provide a convenient solution in test station settings.

Fields of application

- For test rigs, vehicle testing, road trials and all-purpose measurement applications
- Deployable both in decentralized, distributed and in centralized measurement setups
- Operable with CAN-interfaces and CAN-data loggers from either imc or 3rd-party manufacturers

Properties and capabilities

Operating conditions:

- Operating temperature: -40°C to +85°C, condensation allowed
- Shock resistance: 50 g (pk over 5 ms)
- Ingress Protection: IP40 (only with optional protective cover on top of the locking slider, otherwise IP20)

CAN-Bus:

- Configurable Baud rate (max. 1 Mbit/s)
- Default configuration ex-factory: Baud rate=125 kbit/s and IDs: Master=2, Slave=3
- Galvanically isolated
- Built-in terminator resistance, manually switchable

Sampling rates and synchronization:

- Configurable CAN data rate
- Simultaneous sampling of all module's channels, as well as across multiple modules
- Synchronization of multiple modules as well as to a global CAN-logger: based on CAN messages (no Sync-signal required)

Power supply:

- Galvanically isolated power supply input
- DC 10 V to 50 V
- LEMO.0B connector (2-pin); alternative power supply via CAN connector (DSUB-9)

On-board signal processing:

- "Virtual channels": integrated signal processor (DSP) for online processing. Data reduction, filtering, scaling, calculations, threshold monitoring, etc.
- Programmable multi-functional status-LED, supporting linkage to virtual channels

Heartbeat-message:

- Configurable with cyclical "life-sign", e.g. for integrity check purposes in test rigs
- Contains checksum for configuration and serial number, e.g. for consistency monitoring (checking of whether the correct module is still being used, for instance in installations undergoing maintenance)

FindMe:

- Identification of a module by means of selective LED flashing (via configuration software; does not occupy any additional CAN messages)

flex-Series: flexible granulation, topology and block assemblies

Click-mechanism:

- Modules joinable to module-blocks: mechanically and electrically connected (CAN and power supply)
- No tools or additional cabling required
- With guide grooves, magnetic catches and locking slider
- Both short and long housing versions joinable: with electrical connection: align on rear side; mechanically only: align on front side
- Direct connection of compatible CAN-logger: imc BUSDAQflex

19" rack solution (subrack):

- Modules designed for insertion into special 19" frames ("boom-box") for installation in test stations
- Rack backplane accommodates the power supply, CAN and slot information (automatically read out configuration information for use in automation software)

Mounting:

- Mountable by means of recessed threaded holes (M3), either individually or jointly as a block
- Rubber bumper rails providing secure placement in laboratory settings
- Various brackets and handles, and DIN top-hat rail mounting kit available as accessories



imc CANSASflex modules connected (Click-mechanism) in a block with imc BUSDAQflex Logger (left)



rear view of this block: CAN, Power supply, Terminator, Locking slider

Software

Configuration:

- Using imc CANSAS software (free of charge), including dbc-export
- Autostart with saved configuration; also pre-configurable at factory
- The module's current configuration can be read out and exported by the software; For transfer of configuration via physical transport of the module; for back tracing and recovery.
- Supports the CANopen® protocol according "CiA® DS 301 V4.0.2" and "CiA® DS 404V1.2"; 4 TPDOs (Transmit Process Data Objects) in INT16, INT32 and FLOAT. See "CANSAS CANopen®" for a detailed description of the supported features and settings.

Measurement operation:

- Data logger operation:
 - Software: imc STUDIO
 - Hardware: imc measurement system with CAN-Interface, e.g. imc BUSDAQ, imc C-SERIES, imc SPARTAN and imc CRONOS device family (CRFX, CRXT, CRC, CRSL)
- With any desired CAN-interfaces and CAN-loggers from 3rd-party manufacturers


Models and Options

Order Code	Signal connection	Option/Extra	Housing	article no.
CANFX/SCI8	DSUB-15		S0	12500005
CANFX/SCI8-SUPPLY	DSUB-15	sensor supply	S1	125000xx
CANFX/L-SCI8	DSUB-15		L0	12500042
CANFX/L-SCI8-SUPPLY	DSUB-15	sensor supply	L1	12500061
CANFX/L-SCI8-2T	thermo.-connector	type K	L1	12500064
CANFX/SCI16	DSUB-15		S1	12500003
CANFX/L-SCI16	DSUB-15		L1	12500041
CANFX/L-SCI16-SUPPLY	DSUB-15	sensor supply	L1	12500055
CANFX/L-SCI16-2T	thermocouple- terminal connector	type K	L2	12500014
CANFX/L-SCI16-2T-T		type T	L2	12500062
CANFX/L-SCI16-2T-J		type J	L2	12500091

Additional-Option (Order option ex-factory)

- Variants with integrated Sensor supply, configurable voltage settings

Mechanical drawings with dimensions

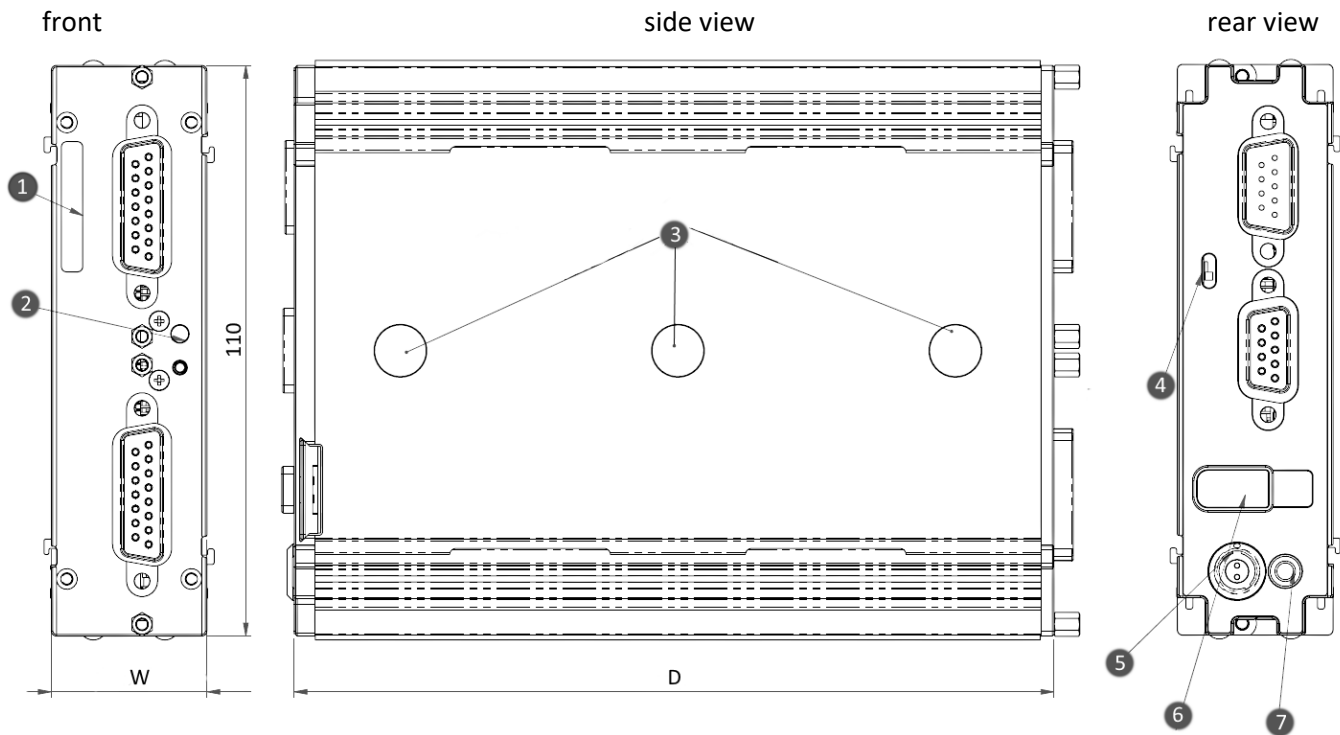

Shown in standard operating orientation: housing type L0; width (W) = 30 mm.

Housing type	S0	S1	S2	L0	L1	L2
W: Width	30 mm	50.3 mm	70.6 mm	30 mm	50.3 mm	70.6 mm
D: Depth	93 mm, with two magnets			146.5 mm, with three magnets		

Legend:

- 1: Serial number label
- 2: Status LED (blue / red)
- 3: magnet (depending on model)
- 4: adjustable CAN terminator
- 5: supply socket (LEMO)
- 6: locking slider CAN/supply
- 7: ground connection M3

Accessories and Connectors

Included accessories

Documents		
Getting started with imc CANSAS (one copy per delivery)		
Device certificate		
Miscellaneous		
Grounding set consisting of: a spring washer S3 (stainless steel), a flat washer (A3.2 DIN 433 A2) and a pan-head screw M3x8 (mounted on the rear panel).		

Optional accessories

AC/DC power adaptor 110-230V AC (with appropriate LEMO plug)		
ACC/AC-ADAP-24-60-0B	24 V DC, 60 W, LEMO.0B.302	13500246
Power plug		
ACC/POWER-PLUG3	Power connector for DC supply LEMO FGG.0B.302, solder contact, max. 0.34 mm ²	13500033
ACC/CABLE-LEMO-0B-BAN-2 M5	Power supply cable LEMO/banana 2.5 m	13500276
DSUB-9 plug (CAN)		
CAN/RESET	Reset-plug (DSUB-9 female)	10500025
CAN/KABEL-TYP2	CAN-Bus connection cable 2x DSUB-9 1:1, 2 m length	10500027
DSUB-15 plug		
ACC/DSUBM-U4	DSUB-15 plug with screw terminals for 4-channel voltage measurement.	13500166
ACC/DSUBM-TEDS-U4	U4 plug variant with TEDS support, according IEEE 1451.4 for use with imc Plug & Measure	13500189
ACC/DSUBM-I4	DSUB-15 plug with screw terminals for 4-channel current measurement of up to 50 mA (shunt 50 Ω, scaling factor 0.02 A/V)	13500168
ACC/DSUBM-TEDS-I4	I4 plug variant with TEDS support, according IEEE 1451.4 for use with imc Plug & Measure	13500192
ACC/DSUBM-T4	DSUB-15 plug with screw terminals for 4-channel measurement of voltages as well as temperatures with PT100 and thermocouples with integrated cold junction compensation (CJC).	13500167
ACC/DSUBM-TEDS-T4	T4 plug variant with TEDS support, according IEEE 1451.4 for use with imc Plug & Measure	13500190
Handle		
CANFX/HANDLE-S	CANFX handle kit (left and right) - short (S)	12500027
CANFX/HANDLE-L	CANFX handle kit (left and right) - long (L)	12500028
Mounting brackets for fixed installations		
CANFX/BRACKET-CON-S	CANFX connection bracket short	12500019
CANFX/BRACKET-CON-L	CANFX connection bracket long	12500020
CANFX/RACK	19" Rack	12500094
CANFX/RACK-BLOCK	19" Rack frame for entire block CANFX/BUSFX	12500103

Mounting brackets for DIN Rail		
CANFX/BRACKET-DIN-S0	CANFX DIN Rail mounting bracket - Type S0	12500021
CANFX/BRACKET-DIN-S1	CANFX DIN Rail mounting bracket - Type S1	12500022
CANFX/BRACKET-DIN-L0	CANFX DIN Rail mounting bracket - Type L0	12500024
CANFX/BRACKET-DIN-L1	CANFX DIN Rail mounting bracket - Type L1	12500025
CANFX/BRACKET-DIN-L2	CANFX DIN Rail mounting bracket - Type L2	12500026

Miscellaneous		
CANFX/RUBBER-1M	silicone strip blue 1 m	12500029
CANFX/COVER-IP40	protective cover on top of the locking slider in compliance with IP40 ingress protection class	12500069
CANFX/USB-P	USB-CAN interface (CAN: DSUB-9, USB 2.0); AC/DC power adaptor, 24 V DC, 60 W, with LEMO.0B plug; CAN cable, DSUB-9 (F, terminated) - DSUB-9 (M, terminated); CAN reset plug; imc CANSAS configuration software (download)	12500043

Documents		
SERV/CAL-PROT	Calibration protocol per amplifier imc manufacturer calibration certificate with measurement values and list of calibration equipment used (pdf).	150000566
SERV/CAL-PROT-PAPER	Calibration protocol per amplifier (paper print) imc manufacturer calibration certificate with measurement values and list of calibration equipment used with signature and seal.	150000578

Device certificates and calibration protocols: Detailed information on certificates supplied, the specific contents, underlying standards (e.g. ISO 9001 / ISO 17025) and available media (pdf etc.) can be found on our website, or you can contact us directly.

Technical Specs - SCI8/-SCI16

Channels, Measurement modes		
Parameter	Value	Remarks
Channels		
SCI16	16	4x DSUB-15 with each 4 channels
SCI8	8	2x DSUB-15 with each 4 channels
Measurement mode DSUB	voltage measurement current measurement temperature measurement: thermocouple, RTD (PT100)	voltage plug (ACC/DSUBM-U4) shunt plug (ACC/DSUBM-I4) thermo plug (ACC/DSUBM-T4)
Measurement mode Thermocouple terminal socket (-2T)	thermocouple type-K	miniature thermocouple terminal
terminal socket (-2T-T)	thermocouple type-T	miniature thermocouple terminal
terminal socket (-2T-J)	thermocouple type-J	miniature thermocouple terminal

Sampling rate, Bandwidth, CANopen®, TEDS		
Parameter	Value	Remarks
Sampling rate		max. allowable input signal frequency:
SCI16	max. 500 Hz (2 ms) / channel	100 Hz
SCI8	max. 1 kHz (1 ms) / channel	150 Hz
		The data rates 500 Hz and 200 Hz are based on a slower working sampling rate and will be interpolated.
Sampling rate, Temperature		recommended maximum for optimized noise reduction; filter:
SCI16	max. 1 Hz (1 s) / channel	12 Hz (-3 dB); -60 dB @ 50 Hz
SCI8	max. 2 Hz (500 ms) / channel	no restrictions for input signal frequency (except for narrow band 0.5 Hz to 12 Hz); All channels with the same sampling rate.
Bandwidth		with compensation filter, at sampling rate
SCI16	23 Hz sampling rate / 7	500 Hz (2 ms), 200 Hz (5 ms) 100 Hz (10 ms) to 2 Hz (500 ms)
SCI8	42 Hz sampling rate / 7	1 kHz (1 ms), 500 Hz (2 ms) 200 Hz (5 ms) to 5 Hz (200 ms)
Resolution	16 bit	
CANopen® mode	"CiA® DS 301 V4.0.2" and "CiA® DS 404V1.2" supports 4 PDOs in INT16, INT32, and FLOAT	SCI16: in CANopen® mode: max. 100 Hz (10 ms) / channel SCI8: in CANopen® mode: max. 200 Hz (5 ms) / channel
TEDS - Transducer Electronic Data Sheets	conformant to IEEE 1451.4 Class II MMI	ACC/DSUBM-TEDS-xxx

General			
Parameter	Value (typ. / max)		Remarks
Block isolation CAN-bus DC supply input	± 60 V ± 60 V		each function block to case (CHASSIS) nominal rating; tested: 300 V (10 s) nominal rating; tested: 300 V (10 s)
Max. common-mode input voltage	± 60 V		analog input to case (CHASSIS) nominal rating; tested: 300 V (10 s)
Channel isolation:	± 60 V		max. voltage between any two arbitrary input pins of different channels; for specified accuracy nominal rating testing: 300 V (10 s)
Overvoltage protection	± 60 V		differential channel input voltage (long-term)
Input configuration	DC, differential		isolated to: case, supply and CAN-bus
Input impedance (static)	10 M Ω 1 M Ω 50 Ω		voltage mode ≤ 10 V voltage mode ≥ 20 V current mode (Shunt plug)
Input current:			dynamic input currents: (scanner/multiplexer)
static	1.5 nA (typ.)	15 nA (max.)	settled current at time of sampling
dynamic	0.1 mA (typ.)	1.5 mA (max.)	peak dynamic input current (typ. @100 mV, max. @10 V)
on overvoltage condition	10 nA (typ.)	1 μ A (max.)	average dynamic input current (typ. @100 mV, max. @10 V)
		1.5 mA	$ V_{in} > 17$ V in range ± 10 V
Noise	25 μ V _{pk-pk} 10 mV _{pk-pk} 0.5 K _{pk-pk} 6 μ V _{pk-pk}	5 μ V _{rms} 2 mV _{rms} 0.08 K _{rms}	sample rate: 2 ms, $R_s = 50 \Omega$ range ± 100 mV range ± 20 V thermocouple type K sample-rate: 1 s, $R_s = 50 \Omega$
Source impedance	5 k Ω		of sensor or signal source
Cable length (signal-input)	200 m		100 pF / m
Crosstalk (channel to channel)	< -105 dB		60 Hz, source impedance $R_s = 100 \Omega$, range ± 100 mV
CMRR / IMR	100 dB (50 Hz)		Common-Mode reference: case (CHASSIS) all other channels: CHASSIS

Voltage measurement			
Parameter	Value typ.	min. / max.	Remarks
Input ranges	±60 V, ±20 V, ±10 V, ±5 V, ±2 V, ±1 V, ±500 mV, ±200 mV, ±100 mV		
Gain error	<0.025%	<0.05%	at 25°C with voltage plug
Gain drift	30 ppm/K 50 ppm/K	60 ppm/K 90 ppm/K	range ≤±10 V range ≥±20 V
Offset error	<0.02%		over entire temperature range
Linearity error	<50 ppm		range ±10 V

Current measurement with shunt plug			
Parameter	Value typ.	min. / max.	Remarks
Input ranges	±40 mA, ±20 mA, ±10 mA, ±4 mA, ±2 mA		
Shunt impedance	50 Ω		
Gain error	<0.075%	<0.15%	at 25°C
Offset error	<0.02%		over entire temperature range

Temperature measurement - Thermocouple			
Parameter	Value typ.	min. / max.	Remarks
Measurement mode	R, S, B, J, T, E, K, L, N		(max. one type per configuration)
Range	-50°C to +1760°C -50°C to +1760°C -45°C to +1820°C -210°C to +1200°C -270°C to +400°C -270°C to +1000°C -270°C to +1240°C -200°C to +900°C -270°C to +1300°C		type R type S type B type J type T type E type K type L type N
Temperature error	±0.2 K	<±0.5 K	-150 °C to max range type: J, T, K, E, L (other types: uncertainties of voltage measurements apply) sample rate SCI16: ≥1 s respectively SCI8: ≥0.5 s with imc plug ACC/DSUBM-T4 also apply for SCI8(16)-2T variant
Drift	±0.02 K/K·ΔT _a		ΔT _a = T _a - 25°C ambient temperature T _a
Error of cold junction compensation		<±0.15 K <±0.5 K	with imc plug ACC/DSUBM-T4 with SCI8(16)-2T-x (thermo socket)
Drift of cold junction	±0.001 K/K·ΔT _j		ΔT _j = T _j - 25°C cold junction T _j

Temperature measurement - RTD (PT100)				
Parameter	Value typ.	min. / max.	Remarks	
Range	-200°C to +850°C		mixed configuration with thermocouples supported; Use of thermo-plug provides complete set of terminals for full 4-wire connection scheme; reference current: 410 µA, int. calibrated	
Gain error		<±0.2 K <±0.05%	-200°C to 850°C, four-wire connection plus percentage of reading	
Drift		±0.01 K/K·ΔT _a	ΔT _a = T _a -25°C ambient temperature T _a	
Optional sensor supply (CANFX/xx-SUPPLY)				
Parameter	Value			Remarks
Configuration options	7 selectable settings			
Output voltage	voltage	current	net power	set globally for all channels of a module
	+2.5 V	580 mA	1.5 W	
	+5.0 V	580 mA	2.9 W	
	+7.5 V	400 mA	3.0 W	
	+10 V	300 mA	3.0 W	
	+12 V	250 mA	3.0 W	
	+15 V	200 mA	3.0 W	
	+24 V	120 mA	2.9 W	
Isolation				
standard	non isolated			output to case (CHASSIS)
optional, upon request	isolated			nominal rating: 50 V, test voltage (10 sec): 300 V
Short-circuit protection	unlimited duration			to output voltage reference ground
Accuracy of output voltage	<0.25% (typ.) / <0.5% (max.) <0.9% (max.)			at terminals, no load 25°C; 2.5 V to 24 V over entire temperature range
Max. capacitive load	>4000 µF >1000 µF >300 µF			2.5 V to 10 V 12 V, 15 V 24 V

Terminal connections		
Parameter	Value	Remarks
Supply input	type: LEMO.0B (2-pin)	compatible with LEMO.EGE.0B.302 multicoded 2 notches for optional individually power supply compatible with connectors FGG.0B.302 (Standard) or FGE.0B.302 (E-coded, 48 V) pin configuration: (1)+SUPPLY, (2)-SUPPLY
Module connector	via locking slider	power supply and networking (CAN) of directly connected modules (Click-mechanism) without further cables
CAN bus	2x DSUB-9	CAN and power supply CAN_IN (male) bzw. CAN_OUT (female) all signals on both DSUB-9 directly 1:1 connected

Operating conditions		
Parameter	Value	Remarks
Ingress protection class	IP40	only with optional protective cover (CANFX/COVER-IP40) on top of the locking slider, otherwise IP20
Operating temperature range	-40°C to 85°C	internal condensation temporarily allowed

Power supply			
Parameter	Value typ.	min. / max.	Remarks
Input supply voltage	10 V to 50 V DC		
Power consumption			12 V DC, over full temperature range without supply
SCI8	2.8 W	<3.3 W	without supply
SCI16	4 W	<5.2 W	without supply
		4.5 W max.	additionally for supply option
Module power supply options	power socket (LEMO) CAN socket (DSUB-9) adjacent module		direct connection imc CANSASflex or imc BUSDAQflex

Pass through power limits for directly connected modules (Click-mechanism)		
Parameter	Value	Remarks
Max. current	8 A	at 25°C current rating of the click connector
	$-50 \text{ mA/K} \cdot \Delta T_a$	Derating with higher operating temperatures T_a $\Delta T_a = T_a - 25^\circ\text{C}$
Max. power	96 W at 12 V DC	Equivalent pass through power at 25°C
	192 W at 24V DC	typ. DC vehicle voltage AC/DC power adaptor and installations
	60 W at 12 V DC 120 W at 24V DC	at +85°C